



## DC-T4537HRXA

**H.265 5MP AI Bullet Camera  
/ NDA Compliant**

- 5MP (2592x1944) resolution
- IDIS Deep-Learning Analytics (IDLA)
- Motorized Vari-focal lens
- micro SD/SDHC/SDXC
- Two-way audio
  
- Alarm in / out



IK10 / IP67 supports

- Built-in heater
- Day and night (ICR)
- True wide dynamic range (WDR)
- IR LED (40m / 131.2 ft (6ea))
- 3-axis mechanical design for installation
- PoE (IEEE 802.3af Class 3)
- Easy installation with DirectIP NVR
- Supports ONVIF



DC-T4 XA





**SPECIFICATIONS**


ACCESSORY CONFIGURATION







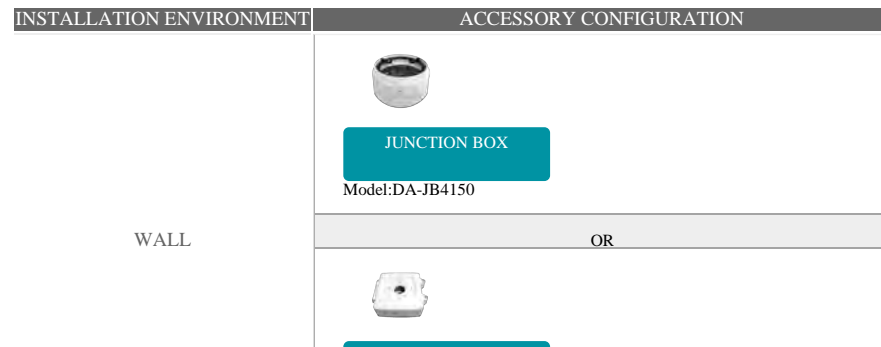

DIMENSION

DOWNLOAD

Video	
Image Sensor	1/2.8" CMOS
Max. Resolution	2592 x 1944
Scanning Mode	Progressive Scan
Lens Type	Motorized Vari-focal
Focal Length	2.7 ~ 13.5mm
Aperture	F1.4 ~ F3.2
Iris Control	DC Iris
Angular Field of View	[4:3 mode] Wide : 101.2°(H) 72.6°(V) 137.4°(D) Tele : 30.4°(H) 22.8°(V) 38°(D)
	[16:9 mode] Wide : 101.7°(H) 53.3°(V) 121.6°(D) Tele : 30.2°(H) 17°(V) 34.7°(D)
Min. Illumination	COLOR : 0.15 lux @ F1.4 B/W : 0 lux (IR LED ON)
Dynamic Range	120dB (True WDR)
Electronic Shutter Speed	Auto / Manual (1/30 ~ 1/10,000), Anti-Flicker, Slow Shutter (1/7.5, 1/15)
Day and Night	Yes (ICR)
IR Distance (LEDs)	40m / 131.2 ft (6ea)
Image Setting	Exposure, White Balance, Self-Adjusting Video Mode(Sharpness, Contrast, Colors, Brightness Control)
Backlight Compensation	-
Mirroring / Pivot	Horizontal / Vertical / Pivot
Image Stabilizer	-
De-fog	Yes
Privacy Masking	8 Zones
Intelligent Video	Video Motion Detection, Active Tampering Alarm, Object Detection, Intrusion, Loitering, Line Crossing, Face Detection
Video Out	-
Network	
Video Compression	H.265, H.264 (MP), M-JPEG
Intelligent Codec	Yes

Bitrate Control	H.265 - CBR / VBR, H.264 - CBR / VBR
Audio Compression	ADPCM 16K, G.726, G.711 u-Law, G.711 a-Law
Two-way Audio	Yes
IP Camera Protocol	DirectIP 2.0, ONVIF Profile S/T
Max. Frame Rate	4:3 mode : 30ips : 2592 x 1944(WDR) 16:9 mode : 30ips : 2592 x 1456(WDR)
Supported Resolution	4:3 : 2592x1944, 1920x1440, 1280x960, 640x480 16:9 : 2592x1456, 1920x1080, 1280x720, 640x360
Multi-video Streaming	Quadruple Streaming
Network Protocols	DirectIP 2.0 Protocol, IPv4, IPv6, RTP/RTSP/TCP, RTP/RTSP/HTTP/TCP, RTP/UDP RTSP/TCP, HTTP, HTTPS, FTP, SNTp, SMTP, FEN, mDNS, Upnp, SNMPv2
Security	Signed firmware, Digest authentication, Password Protection, User access log, IP Filtering, IEEE802.1x(EAP-TLS), Chained Fingerprint, SSL Encryption, HTTPS Encryption
Ethernet	RJ45 (10/100BASE-T)
Recording Session Buffer (NLTSec)	Yes (Up to 60MB)
Edge Storage	micro SD/SDHC/SDXC, Smart Failover (Up to 512GB)
<b>Alarm and Event</b>	
Trigger Event	Motion Detection, Alarm in, Audio detection, Tampering, Object Detection, Intrusion, Loitering, Line Crossing, Face Detection
Event Notification	Remote S/W, Email (with Image)
Audio Alarm	Yes
Audio In / Out	1 / 1
Alarm In / Out	1 / 1
<b>Environmental</b>	
Vandal Proof Casing	IK10
Outdoor Ready	IP67, Heater
Operating Temperature	-40°C ~ +55°C (-40°F ~ +131°F) *Starting up at above -20°C (-4°F)
Operating Humidity	0% ~ 90%
<b>Electrical</b>	
Power Source	PoE (IEEE 802.3af Class 3)
Power Consumption	12V=, 1A, 12W PoE, IEEE 802.3af(Class 3), 9.7W
Approval	FCC, CE, KC
<b>Mechanical</b>	
Dimensions	89.3mm X 89.3mm X 277.6mm (3.52" x 3.52" x 10.93")
Weight	1.293kg (2.85lb)



	 <p>JUNCTION BOX Model:DA-JB2400</p>
CELLING	 <p>JUNCTION BOX Model:DA-JB4150</p>
	OR
	 <p>JUNCTION BOX Model:DA-JB2400</p>
POLE	 <p>JUNCTION BOX Model:DA-JB4150</p>
	+
	 <p>POLE MOUNT Model:DA-LM2000</p>
	OR
	 <p>POLE MOUNT Model:DA-LM2000</p>
	+
 <p>JUNCTION BOX Model:DA-JB2400</p>	
	 <p>CORNER MOUNT Model:DA-RM2000</p>
	+

CORNER



JUNCTION BOX

Model: DA-JB2400

OR



JUNCTION BOX

Model: DA-JB4150




CORNER MOUNT

Model: DA-RM2000

(Unit - mm)



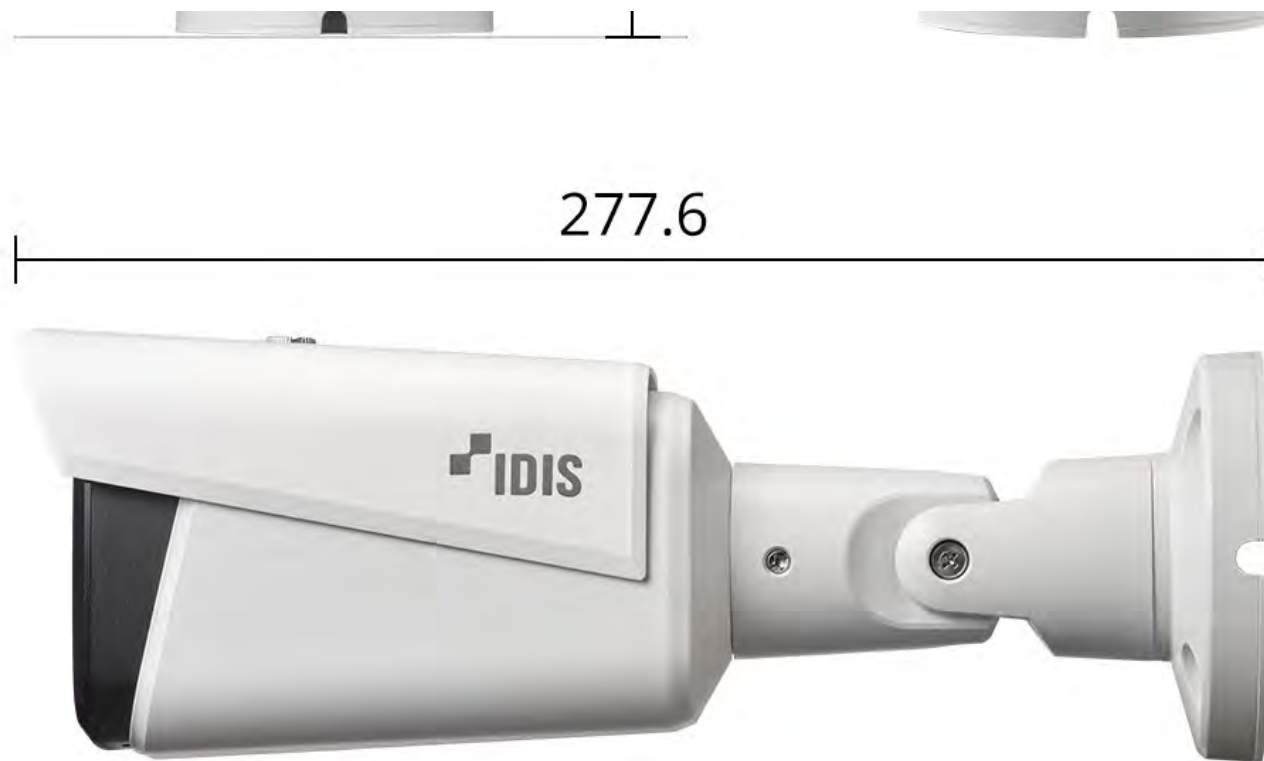

- [Manual](#) DC-T4537 Series Quick Guide v1.0
- [Manual](#) DC-T4537 Series Operation Manual v1.0
- [Manual](#) DC-T4537 Series Installation Manual v1.0
- [Software](#) DC-T4537 Series Firmware v1.2.0\_JAPAN
- [Software](#) DC-T4537 Series Firmware v1.2.0
- [Brochure](#) DC-T4537HRXA

### Products

- [Products Selector](#)
- [Network Recorders](#)
- [Network Cameras](#)
- [HD Analog Recorders](#)
- [HD Analog Cameras](#)
- [Software Solutions](#)
- [Accessories](#)

### Solutions

- [DirectIP®](#)
- [DirectCX®](#)
- [4K Total Solution](#)
- [Compact Solution](#)
- [AI Solution](#)
- [ANPR/LPR](#)
- [Vertical Solutions](#)

### Technology

- [Intelligent Codec](#)
- [Critical Failover](#)
- [Smart Failover](#)
- [Smart UX Controls](#)
- [Cybersecurity](#)

### Support

- [Technical Resources](#)
- [IDIS Ultimate Warranty](#)
- [Design Tool](#)
- [BIM Families](#)
- [Frequently Asked Questions](#)
- [Glossary](#)
- [Technology Partner](#)

### Marketing Resources

- [Virtual Kiosk](#)
- [Case Studies](#)
- [Catalogs](#)
- [Technical Brochures](#)
- [Newsletters](#)
- [Whitepapers](#)
- [Videos](#)
- [Print Ads/Posters](#)
- [Advertorial](#)

### About Us

- [About IDIS](#)
- [Contact Us](#)
- [Inquiry](#)
- [Where to Buy](#)
- [IDIS ESG](#)
- [IDIS Smart](#)
- [GDPR Compliance](#)
- [Latest News](#)
- [Events](#)

### Newsletter Subscription

Sign up and be the first to know



By submitting your email address, you agree to our [Privacy Policy](#).

Subscribe

Sites of IDIS

